

Product Data Sheet: CPT Call Point - EN 54 Compliant

Description

A unique manual call point, with high visibility LED, and which includes both frangible and resettable windows. It also offers user-friendly selection of the usual monitoring resistors.

Each Surface Mount call point comes complete with back box on which the call point is mounted. The back box incorporates rear entry and fixing holes.

The FLUSH call point mounts into a standard U.K. single gang back box with depth of 25mm or greater.

All Call Points fitted with 470Ω and 680Ω resistor as standard, selectable by jumper links.


Either glass or resettable elements are compatible for all call points. Elements are interchangeable.

Complies with EN 54 Part 11 Specification.

Transparent hinged cover is also available.



Dimensions

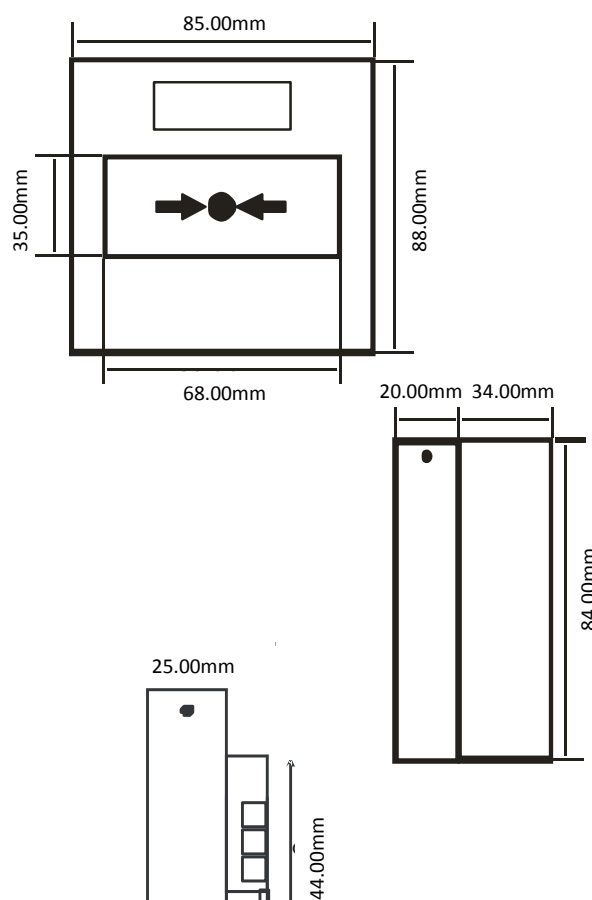

Ordering Information

Part No:	Product Code:	Description:
302-021	CPT-G-DOUBLE	Call Point - Green - Double Pole
308-016	CPT-HC	Hinged Cover
308-017	CPT-GL-10	Spare Glass x 10
308-018	CPT-BOX	Call Point Box
308-019	CPT-KEY-10	Spare Keys x 10

Technical Information

Model:	Standard
Configuration:	Normally Open
Terminal Details:	A, B = +ve C, D = -ve Jumper links to select either resistor blocking diode or clean contact changeover
Voltage Range:	Max 30Vdc
Temperature Range:	- 10°C to + 55°C
Materials:	ABS / Frangible Glass / Polycarbonate Plastic
Weight: Break Glass:	161g
Resettable:	165g

FOR FLUSH MOUNTING

