

Voltage Range (VDC): 18 - 30
Temperature Range (°C): -20 to +70
Flash Rate: c.1Hz (Approved)
(Option for 0.5Hz does not comply with EN54-23)
Beacon coverage: C-3-8 (Approved)
(Option for C-3-4 does not comply with EN54-23)
Coverage volume: 151m³
Monitoring: Reverse Polarity
Protection Rating: IP33C Deep Base
Protection Rating: IP21C Shallow Base
Boxed Weight (kg): 0.25
Base Diameter (mm): Ø93.0
Material: ABS fire retardant plastic
For installation requirements, use Fire rated cable,
2-core plus screen


Maintenance: Refer to local test and maintenance guidance

Voltage Range
18 - 30VDC



0905-CPR-00473

EN54-23



For any technical queries contact
Tel: +44 (0) 1420 592 444
E-mail: technical@cranfordcontrols.com


Doc Ref: 125-112 Issue: 004 Date 09.2020

Made in UK

Full datasheet available - DS136
www.cranfordcontrols.com

1. N/A
2. N/A
3. (-) Negative
4. (-) Negative
5. (+) Positive
6. (+) Positive

MOUNTING TEMPLATE

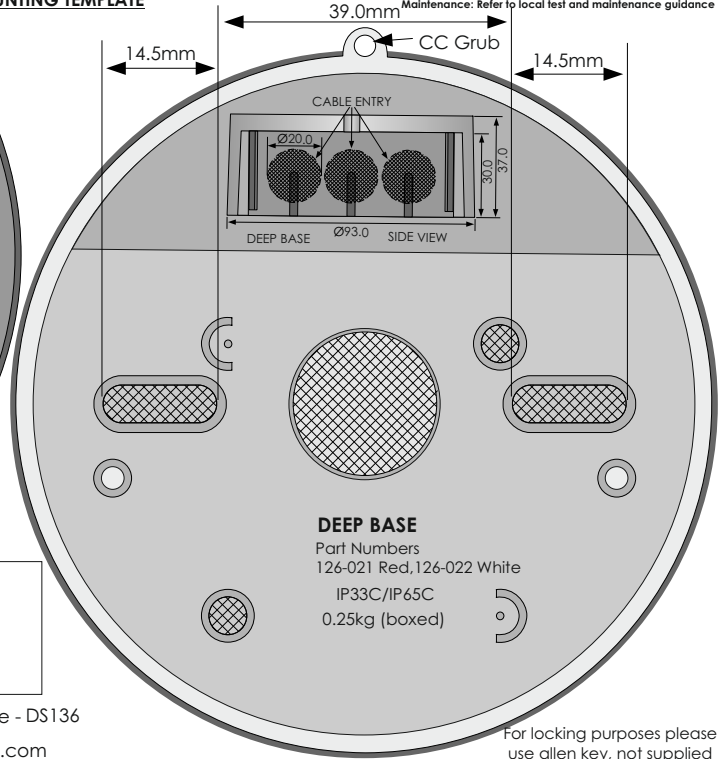

For locking purposes please
use allen key, not supplied

Voltage Range (VDC): 18 - 30
Temperature Range (°C): -20 to +70
Flash Rate: c.1Hz (Approved)
(Option for 0.5Hz does not comply with EN54-23)
Beacon coverage: C-3-8 (Approved)
(Option for C-3-4 does not comply with EN54-23)
Coverage volume: 151m³
Monitoring: Reverse Polarity
Protection Rating: IP33C Deep Base
Protection Rating: IP21C Shallow Base
Boxed Weight (kg): 0.25
Base Diameter (mm): Ø93.0
Material: ABS fire retardant plastic
For installation requirements, use Fire rated cable,
2-core plus screen


Maintenance: Refer to local test and maintenance guidance

Voltage Range
18 - 30VDC



0905-CPR-00473

EN54-23



For any technical queries contact
Tel: +44 (0) 1420 592 444
E-mail: technical@cranfordcontrols.com


Doc Ref: 125-112 Issue: 004 Date 09.2020

Made in UK

Full datasheet available - DS136
www.cranfordcontrols.com

1. N/A
2. N/A
3. (-) Negative
4. (-) Negative
5. (+) Positive
6. (+) Positive

MOUNTING TEMPLATE

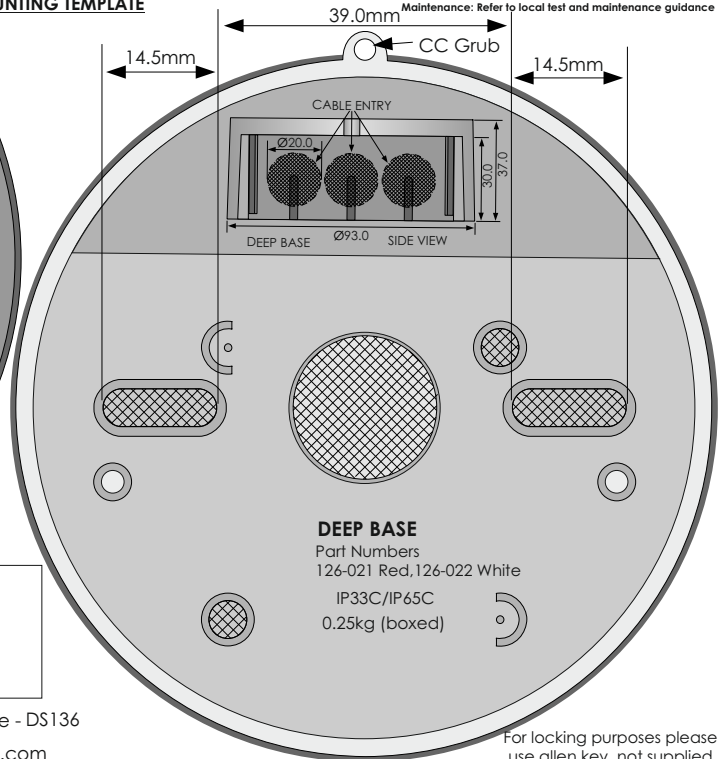

For locking purposes please
use allen key, not supplied